




# SKPS


Acoplamiento de poliamida reforzada con fibra de vidrio y cubo de bronce



formschlüssige Nabenverbindung



Gewindestifte M3x4 DIN 916

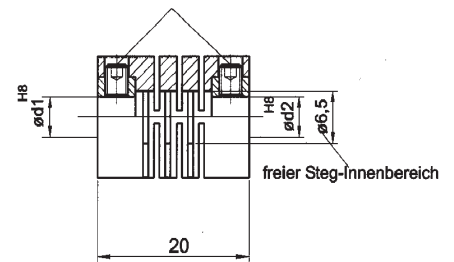

Referencia	Ø Interior	Ø Exterior	Longitud	Par Nominal	Velocidad Máxima	Desalineamiento Angular Máximo Admisible	Precio €
<b>SKPS.1520</b>	03/03 mm	15 mm	20 mm	0,2 Nm	12.000 rpm	2,5°	<b>6,30</b>
	04/04 mm						
	04/06 mm						
	05/05 mm						
	06/06 mm						
<b>SKPS.2224</b>	06/06 mm	22 mm	24 mm	0,8 Nm	10.000 rpm	3°	<b>6,80</b>
	06/08 mm						
	06/10 mm						
	08/08 mm						
	10/10 mm						

